

Novelio[®] FUSION



IMPACT AND CRACK RESISTANT

A high-strength solution that smooths over imperfections, protects walls, and extends their lifespan for up to 25 years.



MADE OF NON-TOXIC MATERIAL & PVC-FREE

Oeko-Tex 100 certification guarantees use of substances that are safe for your health and the environment.



IMPROVED QUALITY OF INDOOR AIR

Durable material with unrestricted airflow that limits the formation of mold and bacteria on your walls, in addition to having very low VOC emissions (A+ certification).



FINE



WHITE
RAL 9010
T8201N




FLAT




WHITE
RAL 9010
T8207N



FLAIR




ALMOND
T8011N




NUTMEG
T8014N



RICE
T8013N




SANDBANK
T8015N



MOONLIGHT
T8018N



SNOW
T8017N



CITY
T8019N



CONCRETE




HELSINKI
T8051N




RIO
T8053N




CASABLANCA
T8052N



CHICAGO
T8054N



NEW YORK
T8055N



DUBAI
T8056N



BERLIN
T8057N



ALMOND
T8021N



NUTMEG
T8024N




SNOW
T8027N



RICE
T8023N



SANDBANK
T8025N



TERRACOTTA
T8028N



ALMOND
T8031N



NUTMEG
T8034N




SNOW
T8037N



RICE
T8033N




SANDBANK
T8035N




GOLD
T8038N


CHARM



ALMOND
T8071N



RICE
T8073N



NUTMEG
T8074N




SANDBANK
T8075N



SNOW
T8077N

GRASSCLOTH

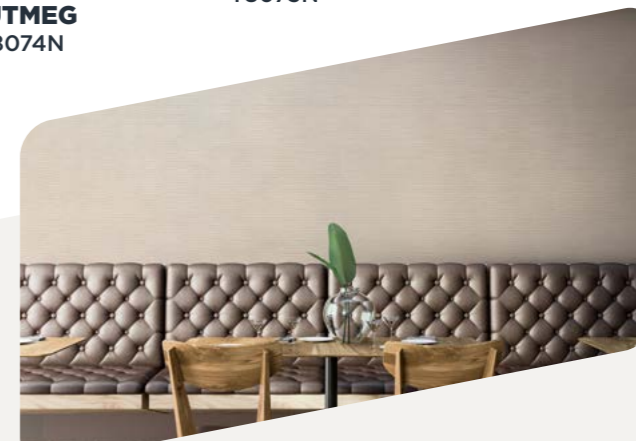

FINE



WHITE
RAL 9010
T8201N

FLAT



WHITE
RAL 9010
T8207N

PURE

ALMOND
T8021N



RICE
T8023N

NUTMEG
T8024N

SNOW
T8027N

SANDBANK
T8025N

TERRACOTTA
T8028N

CHARM

ALMOND
T8031N



RICE
T8033N

NUTMEG
T8034N

SNOW
T8037N

SANDBANK
T8035N

GOLD
T8038N

FLAIR

RICE
T8013N

ALMOND
T8011N

NUTMEG
T8014N



SANDBANK
T8015N

SNOW
T8017N

MOONLIGHT
T8018N

CITY
T8019N



CONCRETE



CASABLANCA
T8052N

HELSINKI
T8051N

RIO
T8053N

CHICAGO
T8054N

DUBAI
T8056N

NEW YORK
T8055N

BERLIN
T8057N

GRASSCLOTH

ALMOND
T8071N



RICE
T8073N

NUTMEG
T8074N

SNOW
T8077N

SANDBANK
T8075N

Timeless Design Meets Unmatched Durability

Elevate your interiors with Novelio® Fusion wallcoverings — where premium aesthetics meet high performance. Crafted from durable, painted fiberglass, these wallcoverings deliver elegant, contemporary style with no need for painting, saving up to 50 % on application and drying time.

Ideal for residential, hospitality, education, healthcare, commercial spaces, and modular off-site construction Novelio® Fusion conceals imperfections, prevents cracks in new builds, and resists impacts and abrasions for up to 25 years. With high opacity and pre-coated finishes, it applies cleanly over any wall color — available in smooth white or stylish patterns and hues.

PVC-free and A+ certified for low VOC emissions, Novelio® Fusion promotes healthy indoor air quality and allows unrestricted airflow to reduce mold and bacteria. Washable, repaintable, and easy to maintain, it's the smart, sustainable choice for long-lasting wall protection.


INSTRUCTIONS

The wall must be clean (no dust, dirt or grease), dry, even, and primed. Temperature should not be below 8 °C.

1. Cut to length according to room height (+10 cm).
2. Apply the dispersion adhesive evenly on the wall with a roller (approx. 200 g/m).
3. Place the wallcovering panel vertically on the wall and smooth it down with a plastic spatula.
4. Place the adjacent panel edge to edge, respecting the fluidity of the vertical pattern. Wipe off excess glue on the joint with a clean tissue.

Repeat steps 1, 2, and 3 with other panels until you have covered all relevant areas of the room.

We recommend the reverse hanging method for application.



After 3 strips are reverse hung, carefully inspect the wallcovering. If there is variation in color and/or pattern effect, discontinue hanging and contact your distributor immediately.

5. Cut off any surplus — with a knife.

Please note that while we strive to ensure the colors in our catalogues are as accurate as possible, there may be slight variations between the colors you see in the catalogue and the actual product. This can be due to differences in printing processes, lighting conditions, and screen settings. We recommend ordering a real sample to see the true color and texture before making a final purchase. Additionally, for best results, please ensure all rolls are from the same dye lot to avoid any noticeable color differences.

Width = 100 cm • Length = 10 or 50 m

TYPE	PATTERN	COLOUR	WEIGHT [g/m ²] ±8%
T8201N	FINE	White RAL 9010	185
T8207N	FLAT	White RAL 9010	
T8011N	FLAIR	Almond	
T8013N		Rice	
T8014N		Nutmeg	
T8015N		Sandbank	
T8017N		Snow	
T8018N		Moonlight	
T8019N		City	
T8021N	PURE	Almond	200
T8023N		Rice	
T8024N		Nutmeg	
T8025N		Sandbank	
T8027N		Snow	
T8028N		Terracotta	
T8031N	CHARM	Almond	185
T8033N		Rice	
T8034N		Nutmeg	
T8035N		Sandbank	
T8037N		Snow	
T8038N	Gold		
T8051N	CONCRETE	Helsinki	205
T8052N		Casablanca	
T8053N		Rio	
T8054N		Chicago	
T8055N		New York	
T8056N		Dubai	
T8057N		Berlin	
T8071N	GRASSCLOTH	Almond	185
T8073N		Rice	
T8074N		Nutmeg	
T8075N		Sandbank	
T8077N		Snow	

„white products“ = make to stock.

„grey products“ = special mode of production — MOQ is 2 pallets of 1 × 50 m rolls (2,400 m²), with a delivery time of 12 weeks.



SAINT-GOBAIN ADFORS CZ s.r.o.
Sokolovská 106
570 01 Litomyšl • Czech Republic
Tel.: +461 651 110
adfors.eu@saint-gobain.com
eu.adfors.com



www.eu.adfors.com



www.youtube.com