

# Whiteboard Novelio® Magnet Magnetic wallcovering



### Transforms any regular wall into a magnetic board.


Magnetic glass fibre wallcoverings make your walls magnetic.

They are either paintable (easy to maintain and offer similar performance to our Classic wallcovering range) or ready to use which is ideal for beamers and white board markers. Perfect solutions for meeting rooms, offices, retail, childrens bedrooms and classrooms.


## - Durable: The magnetic performance remains the same even after several layers of paint

#### - Power: It will fix up to 25 sheets of paper using our magnets

	Туре	Finish	Weight	Roll size	Rolls/Pallet	Quantity/Pallet
MAGNET	Type	1 111311	g/m²	m x m	pcs	m²
	GV200CMG	paintable	1100	2.6 x 1	20	52
	GV200CMG		1100	10.4 x 1	20	208
	T1006CMG		1050	2.6 x 1	20	52
	T1006CMG		1050	10.4 x 1	20	208
	MWB	ready to use	1200	2,6 x 1,17	40	121,68

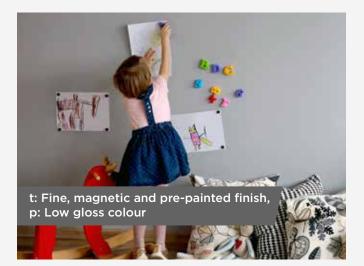





MWB



T1006CMG

## www.adfors.com



#### SAINT-GOBAIN ADFORS CZ s.r.o.

Sokolovská 106 570 01 Litomyšl • Czech Republic Tel. : +420 461 651 111, +420 461 651 231 www.adfors.com

#### Instructions

The wall must be clean (no dust, dirt or grease), dry, even and primed. Temperature should not be below 8 °C.

- Cut to length according to room height (+10 cm).
   Apply the dispersion adhesive evenly on the wall using a roller (-200 g/m<sup>2</sup>).
- a roller (-200 g/m<sup>-</sup>).
   3. Place the wallcovering panel on the wall vertically and smooth it with a plastic spatula.
- and smooth it with a plastic spatula.
  4. Place the adjacent panel edge to edge (respect vertical pattern repeat).
  Repeat steps 1, 2, and 3 with other panels.
- Repeat steps 1, 2, and 3 with other panel until you have finished the room.
- Cut off any surplus with a knife.
   Apply a 1st layer of acrylic paint when the product is dry (-1 day). Apply a 2nd layer of acrylic paint when the product is dry (-1 day). "Not applicable for MWB product (ready to use - no need to paint).

The glass fibre fabric is carefully checked before leaving our factory but should also be checked again just before hanging. Any claim should be accompanied with roll label and a sample featuring the defect.

