


GlasGrid® GG

FOR AREA-WIDE REPAIRS

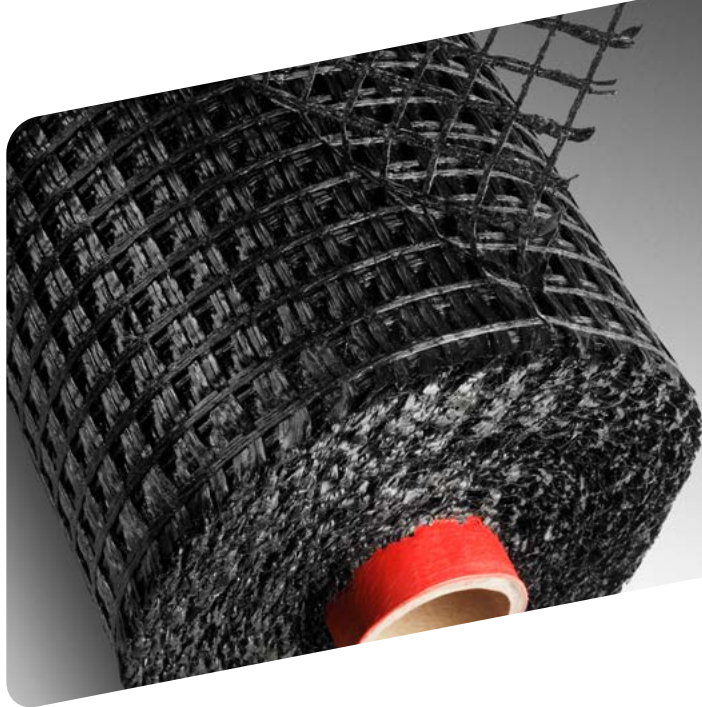

General Description

ADFORS GlasGrid GG Full Lane Width Pavement Reinforcement System is manufactured at a Saint-Gobain ADFORS facility that has achieved ISO 9001:2015 certification and meets the requirements of EN 15381:2008. ADFORS GlasGrid GG is a high strength, open fiberglass grid custom knitted in a stable construction and coated with an elastomeric polymer and self-adhesive glue. Every component of the matrix shall be stabilized against ultraviolet degradation and inert to chemicals normally found in a natural soil environment. ADFORS GlasGrid GG conforms to the property values listed below, which have been derived from quality conformance testing performed by a laboratory:

Properties

- High grid stiffness provides a wrinkle-free installation and a direct load transmission
- Low elongation
- Thermal and chemical stability
- Excellent milling performance

TECHNICAL CHARACTERISTICS

Property	Unit	GG 50	GG 100	GG 200	Test Method
Tensile Strength (MD x XD) Ultimate	kN/m	(55 x 55) - 5	(105 x 105) - 5	(105 x 205) - 5	EN ISO 10319
Tensile Elongation Ultimate	%	2,5 ± 0,5 (105 x 105) - 5	2,5 ± 0,5	2,5 ± 0,5 (105 x 205) - 5	EN ISO 10319
Tensile Resistance @ 2% Strain (MD x XD)	kN/m	(46 x 46) ± 10	(95 x 95) ± 20	(95 x 180) ± 20	EN ISO 10319
Young's Modulus E	MPa	73.000	73.000	73.000	
Mass per Unit Area	g/m ²	212 (8550 type) 220 (8553 type)	417 (8501, 8511 types) 426 (8531 type)	622 (8512 type) 638 (8532 type)	EN ISO 9864
Melting Point Coating	°C	>232	>232	>232	EN ISO 3146/2 ASTM D276
Roll Length	m	150	100	70	
Roll Width	m	1,0; 1,5; 2,0; 3,0	1,0; 1,5; 2,0; 3,0	1,5; 3,0	
Roll Area	m ²	150, 225, 300, 450	100, 150, 200, 300	105, 210	
Adhesive Backing		Pressure sensitive	Pressure sensitive	Pressure sensitive	
Grid Size (Center to Center of Strand)	mm	25 x 25 (8550 type) 30 x 30 (8553 type)	12,5 x 12,5 (8501 type) 25 x 25 (8511 type) 30 x 30 (8531 type)	25 x 19 (8512 type) 30 x 23 (8532 type)	
Material	Fiberglass reinforcement with modified polymer coating and pressure-sensitive adhesive backing.				

The values and tolerances given are obtained in our laboratories and in accredited testing institutions. The information given in this data sheet is to the best of our knowledge true and correct. However new research and practical experience can make revisions necessary. We reserve the right to make changes at any time. Statements concerning possible use of our product are not intended as recommendations for their use in the infringement of any patent. No patent warranty of any kind, expressed or implied, is made or intended.

INSTALLATION

- Complete all crack sealing, pothole filling, base repairs, leveling course application. Road surface must be dry, clean and dust-free with temperature 5 °C –40 °C.
- Unroll the geogrid with the sticky side face down on the flat layer/ leveling course.
- Respect the overlap of end roll joints 10 –15 cm and longitudinal joints at minimum 5 cm.
- Press the grid to the layer to activate glue and ensure bonding between the lower surface and grid.
- Apply tack coat per project requirements.
(See application tack coat rate formula in Installation manual page 4).
- Permit the tack coat to completely cure prior to proceeding.
- Apply a minimum 4 cm thick top asphalt layer after compaction.

See document Installation Procedures for detailed steps available on our [website](#) or watch the [video](#) on YouTube Saint-Gobain ADFORS.



BENEFITS

- Quick and efficient installation due to self-adhesive backing
- High grid stiffness providing a wrinkle free installation
- Easy cutting
- Good trafficability (suppliers, trucks, paver)
- Thermal and chemical stability
- Excellent milling performance
- Measured unlimited recyclability & enhanced properties in Reclaimed Asphalt Pavement (RAP)

PALLETIZATION

Product	Roll width	Roll area	Roll weight	Core inner diameter	No of rolls on pallet	Total area
GG 50	1 m	150 m ²	33 kg	76 mm	12	1 800 m ²
	1,5 m	225 m ²	50 kg	76 mm	12	2 700 m ²
	2 m	300 m ²	67 kg	76 mm	6	1 800 m ²
	2 m	300 m ²	67 kg	76 mm	10	3 000 m ²
	3 m	450 m ²	103 kg	100 mm	6	2 700 m ²
	3 m	450 m ²	103 kg	100 mm	10	4 500 m ²
GG 100	1 m	100 m ²	43 kg	76 mm	12	1 200 m ²
	1,5 m	150 m ²	65 kg	76 mm	12	1 800 m ²
	2 m	200 m ²	86 kg	76 mm	6	1 200 m ²
	2 m	200 m ²	86 kg	76 mm	10	2 000 m ²
	3 m	300 m ²	132 kg	100 mm	6	1 800 m ²
	3 m	300 m ²	132 kg	100 mm	10	3 000 m ²
GG 200	1,5 m	105 m ²	68 kg	76 mm	12	1 260 m ²
	3 m	210 m ²	138 kg	100 mm	6	1 260 m ²
	3 m	210 m ²	138 kg	100 mm	10	2 100 m ²



SAINT-GOBAIN ADFORS CZ s.r.o.
Sokolovská 106
570 01 Litomyšl • The Czech Republic
Tel.: +420 461 651 111
glasgrid.cz@saint-gobain.com
eu.adfors.com

In as much as Saint-Gobain ADFORS has no control over installation design, installation workmanship, accessory materials, or conditions of application, Saint-Gobain ADFORS does not warrant the performance or results of any installation or use of ADFORS GlasGrid GG. This warranty disclaimer includes all implied warranties, statutory or otherwise, including the warranty of merchantability and of fitness for a particular purpose. The purchaser and/or user should perform its own tests to determine the suitability and fitness of the product for the particular purpose desired in any given situation.

ADFORS GlasGrid® is manufactured at an ISO 9001:2015, ISO 14001:2015, ISO 50001:2018 registered facility of Saint-Gobain ADFORS.
ADFORS GlasGrid® is a registered trademark of Saint-Gobain ADFORS.
© 2025 Saint-Gobain ADFORS

